


### 320nm Ultraviolet DPSS Laser



#### †Specifications

Product Code	SSL - 320 - XXXX - XXM - D - LED
Wavelength [ nm ]	320
Output Power [ mW ] [ 0 - Max Adjustable ]	1 - 40
Transverse Mode	TEM <sub>00</sub> / CW
Operating Temperature [ °C ]	+10 - +35
Storage Temperatures [ °C ]	-10 - +45
Warm-up Time [ minutes ]	< 15
Power Stability [ rms, over 4 hours ]	< 5%, < 3%, < 1%
M <sup>2</sup> Factor	~ 1.5
Beam Diameter At The Aperture [ mm ]	< 1.0
Beam Divergence, Full Angle [ mrad ]	~ 2.0
Spectral Linewidth [ nm ]	< 0.1
Polarization Ratio	> 100 : 1
Point Stability After Warm-up [ mrad ]	< 0.05
Noise of Amplitude [ rms ]	< 30%
Modulation [ TTL or Analog Alternative ]	Standard 10KHz, Up to 40KHz need request
Laser Head Dimensions [ mm ]	210 [L] × 86 [W] × 75 [H]
Power Supply Dimensions [ mm ]	260 [L] × 145 [W] × 105 [H]
Working Voltage [ VAC ]	85~245, 50/60Hz
Laser Gross Weight [ kg ]	4.5
Cooling Way	Cooled by TEC and air
Expected Lifetime [ hours ]	> 10000
Warranty Time [ year ]	1

**Laser Head Dimension:**

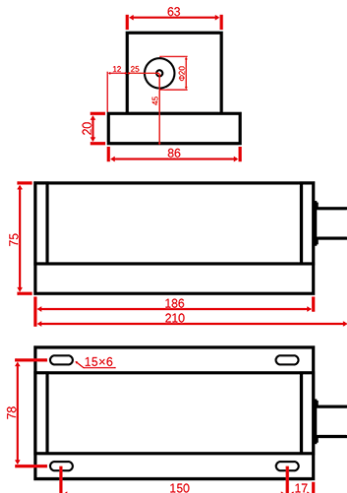

**Power Supply Dimension:**

