
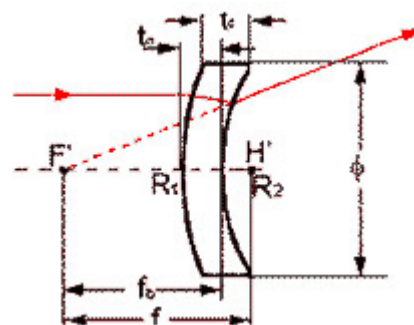


NEGATIVE MENISCUS LENSES

Specification

Material:	N-BK7 or Click this to Glass List 
Dimension Tolerance:	+0 / -0.05mm
Foci Tolerance:	±1%
Center Thickness Tolerance:	±0.05mm
Centeration Deviation:	2'
Surface Figure:	λ/4@632.8nm
Surface Quality:	40 / 20
Bevel:	0.25 × 45°
Clear Aperture:	>90%
Coating:	Specified by customer



PRODUCTS LIST

Part No.	F [mm]	Dia [mm]	R1 [mm]	R2 [mm]	tc [mm]	te [mm]	fb [mm]
SSL-RO-NM-101	-100	25.4	32.59	90	3	4.5	-99.2
SSL-RO-NM-102	-125	25.4	37.26	90	3	4.2	-123.7
SSL-RO-NM-103	-150	25.4	41.42	90	3	4	-149.5
SSL-RO-NM-104	-175	25.4	44.86	90	3	3.8	-174.6
SSL-RO-NM-105	-200	25.4	47.84	90	3	3.7	-199.6
SSL-RO-NM-106	-250	25.4	83.12	235	3	3.6	-248.7
SSL-RO-NM-107	-300	25.4	93.13	235	3	3.5	-298.5
SSL-RO-NM-108	-350	25.4	101.9	235	3	3.4	-348.3
SSL-RO-NM-109	-400	25.4	109.56	235	3	3.4	-397.5
SSL-RO-NM-110	-500	25.4	122.6	235	3	3.3	-496.9
SSL-RO-NM-111	-600	25.4	204.08	600	3	3.2	-597.2
SSL-RO-NM-112	-800	25.4	244.34	600	3	3.2	-796.2
SSL-RO-NM-113	-1000	25.4	277.16	600	3	3.1	-995.3
SSL-RO-NM-114	-1500	25.4	337.6	600	3	3.1	-1492.7
SSL-RO-NM-115	-2000	25.4	378.82	600	3	3.1	-1988.5
SSL-RO-NM-116	-4000	25.4	464.01	600	3	3	-3973.1